

# Using ClassPad-technology in the education of students of electrical engineering (Fourier- and Laplace-Transformation)

Ludwig Paditz, University of Applied Sciences Dresden, Germany  
paditz@informatik.htw-dresden.de

## Abstract:

By the help of several examples the interactive work with the ClassPad330 is considered.

The student can solve difficult exercises of practical applications step by step using the symbolic calculation and the graphic possibilities of the calculator. Sometimes several fields of mathematics are combined to solve a problem.

Let us consider the ClassPad330 (with the actual operating system OS 03.03) and discuss on some new exercises in analysis, e.g. solving a linear differential equation by the help of the **Laplace transformation** and using the **inverse Laplace transformation** or considering the Fourier transformation in discrete time (the **Fast Fourier Transformation FFT** and the **inverse FFT**). We use the **FFT**- and **IFFT**-function to study periodic signals, if we only have a sequence generated by sampling the time signal.

We know several ways to get a solution. The techniques for studying practical applications fall into the following three categories: *analytic*, *graphic* and *numeric*. We can use the Classpad software in the handheld or in the PC (ClassPad emulator version of the handheld).

## References:

[http://edu.casio.com/products/classpad/cp\\_v302/](http://edu.casio.com/products/classpad/cp_v302/)

[http://edu.casio.com/products/classpad/cp\\_v302/laplace.html](http://edu.casio.com/products/classpad/cp_v302/laplace.html)


[http://classpad.net/product/Classpad300/cp\\_manager\\_03.html](http://classpad.net/product/Classpad300/cp_manager_03.html)

Glyn, James: **Advanced Modern Engineering Mathematics**, 3<sup>rd</sup> Edition, 2004 (repr. 2006), ISBN 978-0-13-045425-6


Burg, Klemens; Haf, Herbert; Wille, Friedrich; Meister, Andreas:

**Höhere Mathematik für Ingenieure Band III: Gewöhnliche Differentialgleichungen, Distributionen, Integraltransformationen**, 5th Edition, 2009, ISBN 978-3-8348-0565-2


## Example of solving a linear ODE with initial condition, several ways of solution:

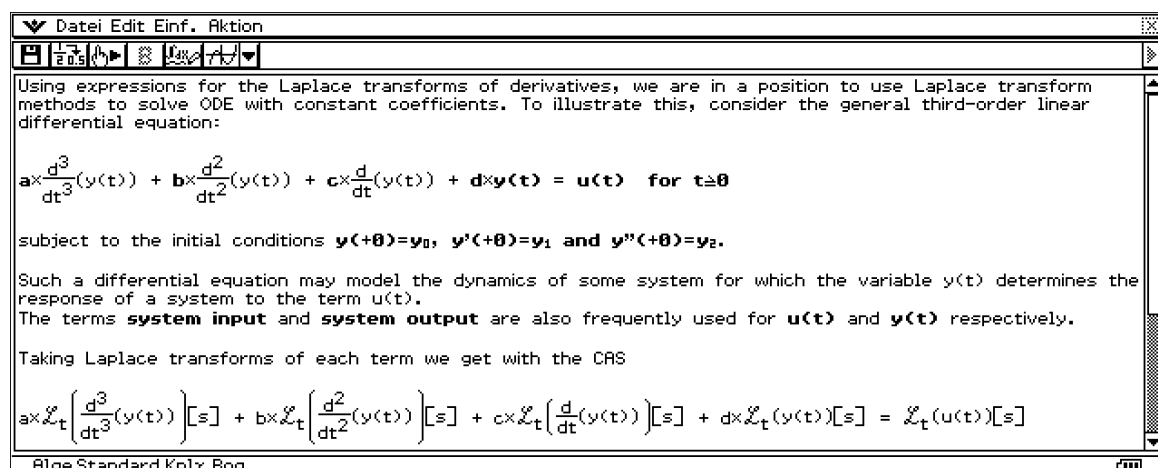


The last input line yields in the CAS software:

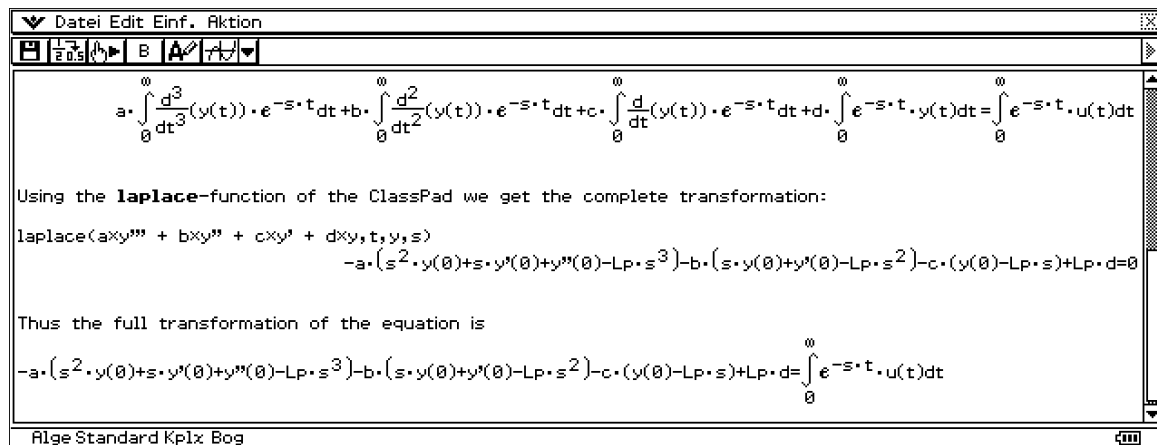

In the last line we have with **Lp** the Laplace transformation of  $y(t)$ , sometimes we denote **Lp** by  $Y(s)$ . Furthermore we discover the initial conditions  $y(0)$ ,  $y'(0)$ ,  $y''(0)$ . We denote the right hand side of the last equation by  $U(s)$  and solve this equation for  $Y(s)$ :

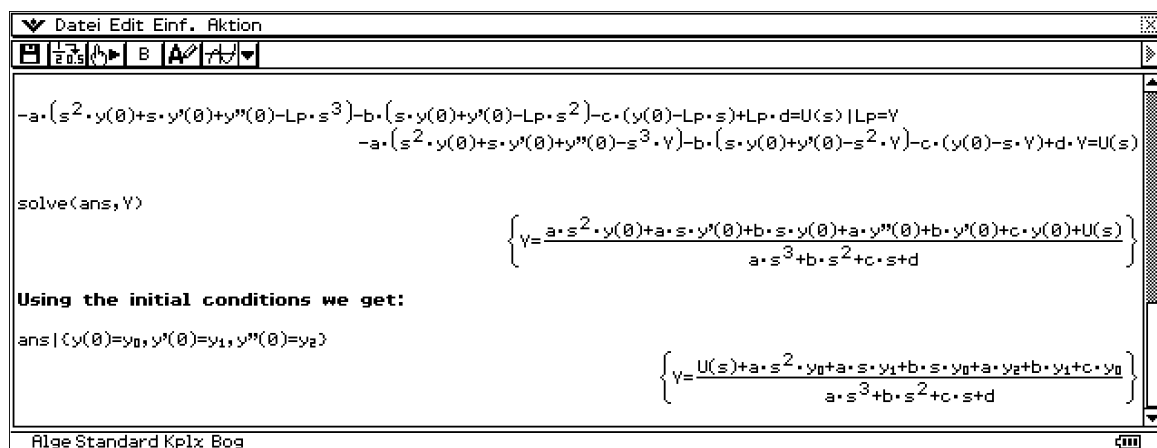

Now we consider the following example:  $a = 1$ ,  $b = -3$ ,  $c = 3$ ,  $d = -1$ ,  $u(t) = \cos(2t) \cdot e^{-t}$  and  $y(0) = 0$ ,  $y'(0) = 1/32$ ,  $y''(0) = -3/16$ .

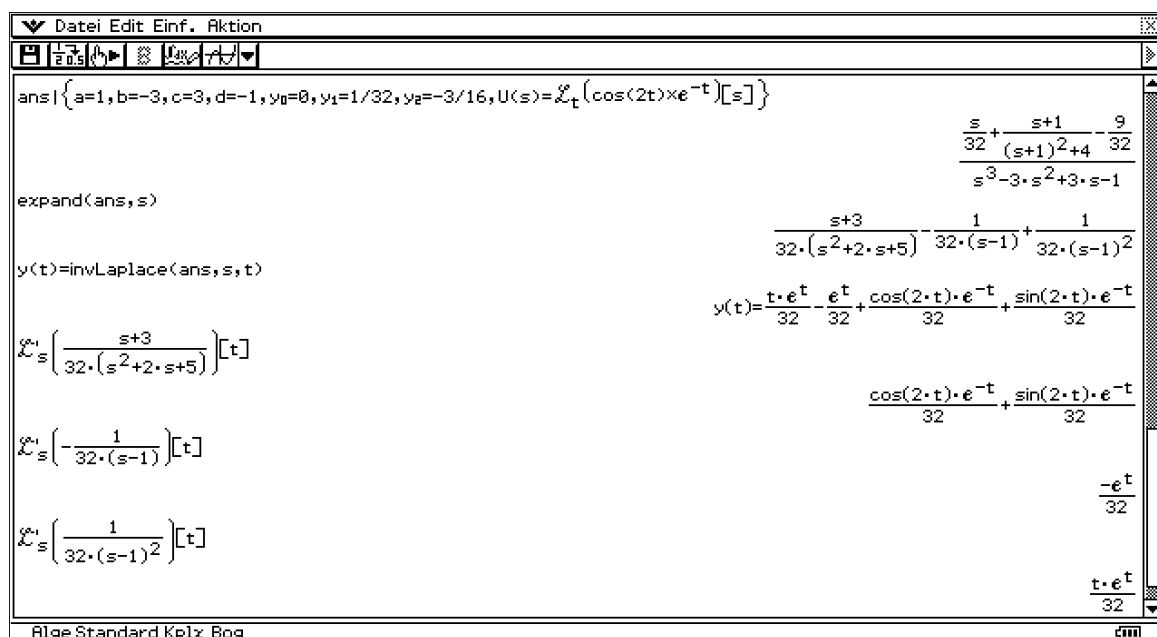

Finally we see the inverse transformation of the several summands. The direct way of solution consists in using the dSolve-function:

▼ Datei Edit Einf. Aktion

$$\text{dSolve}(y'''-3y''+3y'-y=\cos(2t)\cdot e^{-t}, t, y)$$

$$\left\{ y=t^2\cdot e^t\cdot \text{const}(3)+t\cdot e^t\cdot \text{const}(2)+e^t\cdot \text{const}(1)+\frac{\cos(2\cdot t)\cdot e^{-t}}{32}+\frac{\sin(2\cdot t)\cdot e^{-t}}{32} \right\}$$

Define  $y(t)=t^2\cdot e^t\cdot C3+t\cdot e^t\cdot C2+e^t\cdot C1+\frac{\cos(2\cdot t)\cdot e^{-t}}{32}+\frac{\sin(2\cdot t)\cdot e^{-t}}{32}$  done

$$\left\{ \begin{array}{l} y(0)=0 \\ \frac{d}{dt}(y(t))=1/32|_{t=0} \\ \frac{d^2}{dt^2}(y(t))=-3/16|_{t=0} \end{array} \right| C1, C2, C3$$

$$\left\{ C1=-\frac{1}{32}, C2=\frac{1}{32}, C3=0 \right\}$$

$y(t)|\left\{ C1=-\frac{1}{32}, C2=\frac{1}{32}, C3=0 \right\}$

Using the initial conditions we get in one step:

$$\text{dSolve}(y'''-3y''+3y'-y=\cos(2t)\cdot e^{-t}, t, y, t=0, y=0, t=0, y'=1/32, t=0, y''=-3/16)$$

$$\left\{ y=\frac{t\cdot e^t}{32}-\frac{e^t}{32}+\frac{\cos(2\cdot t)\cdot e^{-t}}{32}+\frac{\sin(2\cdot t)\cdot e^{-t}}{32} \right\}$$

Alge Standard Kplx Bog

This exercise shows how to work with the CAS to support the learning process of our students. We can see step by step in the handheld what happens to solve a given problem.

### Example of computing a FFT of a sequence generated by sampling the time signal:

▼ File Edit Insert Action

The Fast Fourier transform (FFT) is an efficient algorithm for computing the Discrete Fourier Transform (DFT).

Consider the  $2\pi$ -periodic function  
 $f(x)=x$ ,  $0\leq x<\pi/2$ , and  $f(x)=\pi-x$ ,  $\pi/2\leq x<\pi$ , and  $f(x)=0$  for  $\pi\leq x<2\pi$ .

**the delayed triangular pulse**

Using  $N=32$  samples at intervals  $T=2\pi/N$ :

At first we define the  $2\pi$ -periodic right-continuous function  $f(x)=x$ ,  $0\leq x<\frac{\pi}{2}$ , and  $f(x)=-x+\pi$ ,  $\frac{\pi}{2}\leq x<\pi$ , and  $f(x)=0$  for  $\pi\leq x<2\pi$ .

Define  $y1(x)=\frac{\pi}{2}-\left|x-\frac{\pi}{2}-2\cdot\pi\cdot\text{intg}\left(\frac{x}{2\cdot\pi}\right)\right|$  done

By the help of the **heaviside function** we get now the delayed triangular pulse:

Define  $y2(x)=y1(x)\cdot H(y1(x))$  done

Alg Decimal Cplx Rad

▼ Edit Zoom Analysis

xc=1.5707963 yc=1.5707963 y-Cal

$y2=y1(x)\cdot \text{heaviside}(y1(x))$

Rad Cplx

The figure displays three instances of the 'Advanced Format' dialog box for the Fourier Transform, each with a different 'Transform Definition' selected from a dropdown menu.

- Left Dialog (Pure Math):** The 'Transform Definition' is 'Pure Math'. The continuous transform formula is  $F_x = \int_{-\infty}^{\infty} f(t) e^{-xtj} dt$ . The discrete transform formula is  $F_n = \sum_{k=0}^{N-1} \left( x_k e^{\frac{-2\pi jkn}{N}} \right)$ . The 'FFT Scaling Constant' dropdown is set to 'Signal Processing'.
- Middle Dialog (Signal Processing):** The 'Transform Definition' is 'Signal Processing'. The continuous transform formula is  $F_x = \int_{-\infty}^{\infty} f(t) e^{-2\pi x t j} dt$ . The discrete transform formula is  $F_n = \frac{1}{N} \sum_{k=0}^{N-1} \left( x_k e^{\frac{-2\pi jkn}{N}} \right)$ . The 'FFT Scaling Constant' dropdown is set to 'Data Analysis'.
- Right Dialog (Classical Physics):** The 'Transform Definition' is 'Classical Physics'. The continuous transform formula is  $F_x = \frac{1}{2\pi} \int_{-\infty}^{\infty} f(t) e^{xtj} dt$ . The discrete transform formula is  $F_n = \frac{1}{\sqrt{N}} \sum_{k=0}^{N-1} \left( x_k e^{\frac{-2\pi jkn}{N}} \right)$ . The 'FFT Scaling Constant' dropdown is set to 'Pure Math'.

Each dialog box also includes a checked option for 'Assume positive real' and buttons for 'Set', 'Cancel', and 'Default'.

```
File Edit Insert Action
```

The screenshot shows a TI-84 Plus CE calculator screen. At the top is a menu bar with "File Edit Insert Action". Below it is a toolbar with icons for variables, mode, memory, and editing. The main display area contains the following text:

Now we generate the sequence listf of the time signals

$$\text{seq}\left(y_2\left(\frac{k \times 2\pi}{32}\right), k, 0, 31, 1\right) \rightarrow \text{listf}$$
$$\left\{0, \frac{\pi}{16}, \frac{\pi}{8}, \frac{3 \cdot \pi}{16}, \frac{\pi}{4}, \frac{5 \cdot \pi}{16}, \frac{3 \cdot \pi}{8}, \frac{7 \cdot \pi}{16}, \frac{\pi}{2}, \frac{7 \cdot \pi}{16}, \frac{3 \cdot \pi}{8}, \frac{5 \cdot \pi}{16}, \frac{\pi}{4}, \frac{3 \cdot \pi}{16}, \frac{\pi}{8}, \frac{\pi}{16}, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0\right\}$$

and compute the FFT, the **clistce** of complex numbers of the estimated discrete Fourier coefficients

$$\text{fRound}\left(\text{FFT}\left(\frac{\text{listf}}{32}\right), 3\right) \rightarrow \text{clistce}$$
$$\{0.393, -0.319 \cdot j, -0.161, 0.036 \cdot j, 0, -0.014 \cdot j, -0.02, 0.008 \cdot j, 0, -0.005 \cdot j, -0.009, 0.004 \cdot j, 0, -0.003 \cdot j, -0.006, 0,$$

**alternative syntax in the FFT-command:**

$$\text{fRound}(\text{FFT}(\text{listf}, 2), 3) \rightarrow \text{clistce}$$
$$\{0.393, -0.319 \cdot j, -0.161, 0.036 \cdot j, 0, -0.014 \cdot j, -0.02, 0.008 \cdot j, 0, -0.005 \cdot j, -0.009, 0.004 \cdot j, 0, -0.003 \cdot j, -0.006, 0,$$

At the bottom, there are tabs for "Alg", "Decimal", "Cplx", and "Rad".

472

File Edit Insert Action

We get the same result by using the Fourier transform (**Advanced Format: Pure Math**) of the delayed triangular pulse, i.e. the **Fourier**-command:

$$F_t\left(-2 \cdot t \cdot H\left(t-\frac{\pi}{2}\right)+t \cdot H(t-\pi)+t \cdot H(t)+\left(H\left(t-\frac{\pi}{2}\right)-H(t-\pi)\right) \cdot \pi\right)[m]$$

$$-\frac{\frac{1}{m^2}+\delta(m) \cdot \pi^2 \cdot e^{-m \cdot \pi \cdot j}-\delta(m) \cdot \pi^2 \cdot e^{\frac{-m \cdot \pi \cdot j}{2}}+\frac{e^{-m \cdot \pi \cdot j}}{m^2}-\frac{2 \cdot e^{\frac{-m \cdot \pi \cdot j}{2}}}{m^2}}{2 \cdot \pi}$$

simplify $\left(\frac{1}{2\pi} \times \text{ans}\right) \rightarrow c_m$

$$\frac{-1}{2 \cdot m^2 \cdot \pi}+e^{\frac{-m \cdot \pi \cdot j}{2}} \frac{1}{m^2 \cdot \pi}-\frac{e^{-m \cdot \pi \cdot j}}{2 \cdot m^2 \cdot \pi}$$

Thus we get the well-known Fourier coefficients  $c_m$  again, i.e.

Define  $y_3(x)=-2 \cdot x \cdot H\left(x-\frac{\pi}{2}\right)+x \cdot H(x-\pi)+x \cdot H(x)+\left(H\left(x-\frac{\pi}{2}\right)-H(x-\pi)\right) \cdot \pi$

**y3(x) is the triangulat pulse with one triangular.**

The  $c_m$  we can write with the **sinc-function**  $c_m=\frac{\pi}{8} \times e^{-j m \pi / 2} \times\left(\frac{\sin (m \pi / 4)}{m \pi / 4}\right)^2=\frac{\pi}{8} \times e^{-j m \pi / 2} \times\left(\operatorname{sinc}\left(\frac{m \pi}{4}\right)\right)^2$

$$F_m\left[\frac{\pi}{8} \times e^{-j m \pi / 2} \times\left(\frac{\sin (m \pi / 4)}{m \pi / 4}\right)^2\right][t]$$

$$\frac{t \cdot(H(t)-H(-t))}{4 \cdot \pi}-\frac{\left(t-\frac{\pi}{2}\right) \cdot\left(H\left(t-\frac{\pi}{2}\right)-H\left(-t+\frac{\pi}{2}\right)\right)}{2 \cdot \pi}+\frac{(t-\pi) \cdot(H(t-\pi)-H(-t+\pi))}{4 \cdot \pi}$$

simplify(2π×ans)

$$-2 \cdot t \cdot H\left(t-\frac{\pi}{2}\right)+t \cdot H(t-\pi)+t \cdot H(t)+\left(H\left(t-\frac{\pi}{2}\right)-H(t-\pi)\right) \cdot \pi$$


Alg Standard Cplx Rad

Have a look into the lists (spreadsheet-application)

	A	B	C	D	E	F	G
1	index m	clistct	clistce	clistct	clistce	error	
2	0	0.392699	0.392699	0.392699	0.392699	0	
3	1	-0.31831·(j)	0	0.31831	0	0.31831	
4	2	-0.159155	-0.322432·(j)	0.159155	0.322432	0.163277	
5	3	0.035368·(j)	0	0.035368	0	0.035368	
6	4	0	-0.167595	0	0.167595	0.167595	
7	5	-0.012732·(j)	0	0.012732	0	0.012732	
8	6	-0.017684	0.039759·(j)	0.017684	0.039759	0.022075	
9	7	6.496E-3·(j)	0	0.006496	0	0.006496	
10	8	0	0	0	0	0	
11	9	-3.93E-3·(j)	0	0.00393	0	0.00393	
12	10	-0.006366	-0.017751·(j)	0.006366	0.017751	0.011385	
13	11	2.631E-3·(j)	0	0.002631	0	0.002631	
14	12	0	-0.028755	0	0.028755	0.028755	
15	13	-1.883E-3·(j)	0	0.001883	0	0.001883	
16	14	-0.003248	0.012757·(j)	0.003248	0.012757	0.009509	
17	15	1.415E-3·(j)	0	0.001415	0	0.001415	
18	16	0	0	0	0	0	
19	17	-1.101E-3·(j)	0	0.001101	0	0.001101	
20	18	-0.001965	-0.012757·(j)	0.001965	0.012757	0.010792	
21	19	8.82E-4·(j)	0	0.000882	0	0.000882	
22	20	0	-0.028755	0	0.028755	0.028755	
23	21	-7.22E-4·(j)	0	0.000722	0	0.000722	
24	22	-0.001315	0.017751·(j)	0.001315	0.017751	0.016436	
25	23	6.02E-4·(j)	0	0.000602	0	0.000602	
26	24	0	0	0	0	0	
27	25	-5.09E-4·(j)	0	0.000509	0	0.000509	
28	26	-0.000942	-0.039759·(j)	0.000942	0.039759	0.038817	
29	27	4.37E-4·(j)	0	0.000437	0	0.000437	
30	28	0	-0.167595	0	0.167595	0.167595	
31	29	-3.78E-4·(j)	0	0.000378	0	0.000378	
32	30	-0.000707	0.322432·(j)	0.000707	0.322432	0.321725	
33	31	3.31E-4·(j)	0	0.000331	0	0.000331	
34							

633

Consider graphical representations of the absolute values of coefficients:

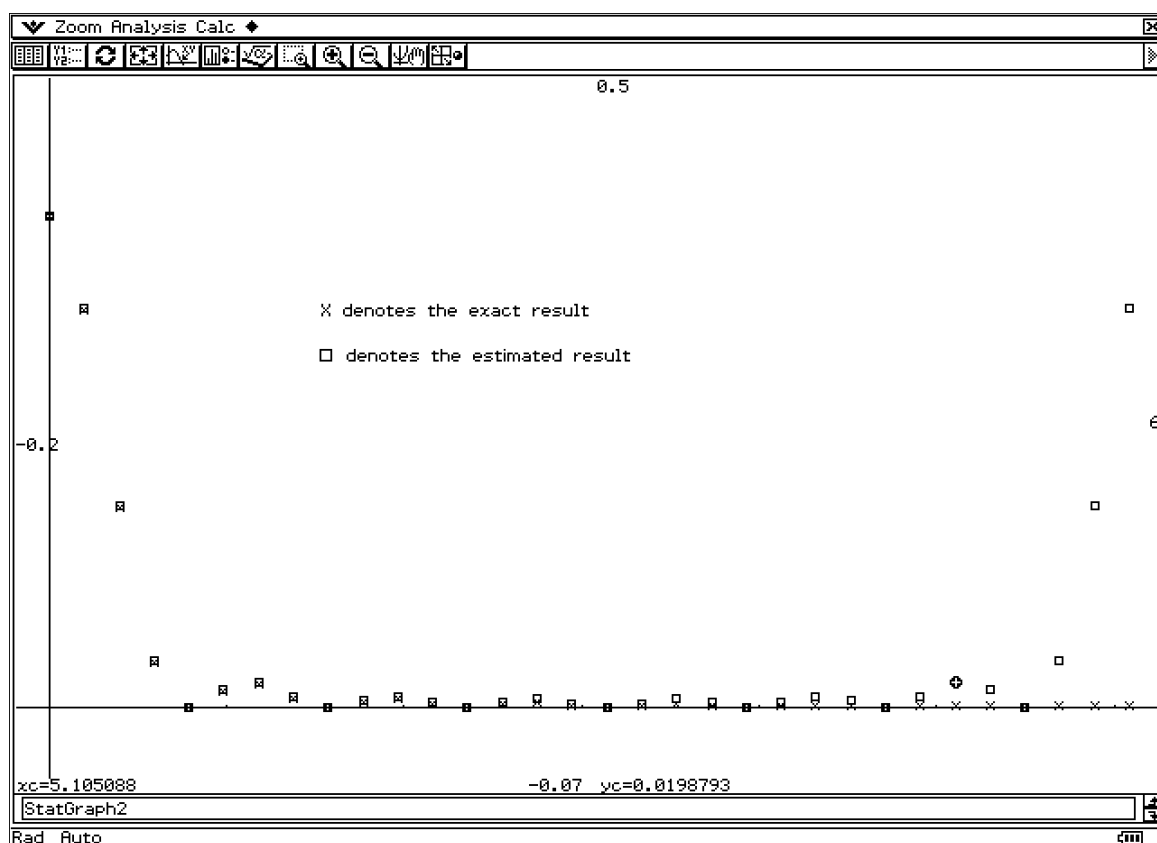

Graphical representations of the Fourier polynomial:

